





POWERMIX - THE EXPERT

FACTS

Type: Mixing pump for silos

Application: Lime cement plaster, self-levelling materials

Characteristics: Double mixing (combined mixing)

FEATURES




- Extremely high quality of material and processing
- Ideal for dry premixed mortar products
- Minimum wear thanks to the excellent adjustment of components
- Top mixing quality through combined mixing (vertical and horizontal)
- Easy-to-use control panel with intuitive layout
- Plug-'n'-Work principle: ready to use once connected to power and water



Optimized material feeding system



Powermix

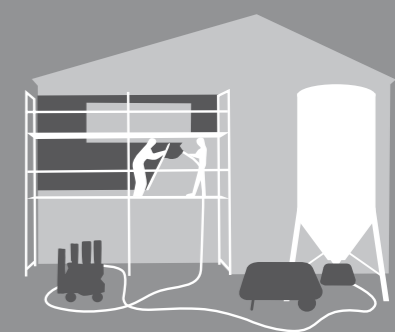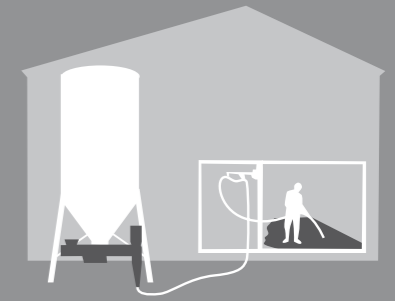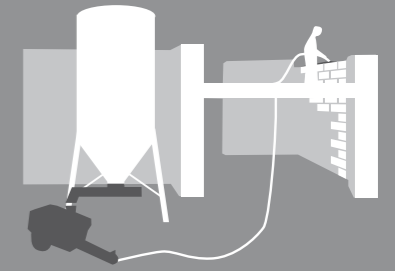

TECHNICAL DATA

Capacity*	ca. 30-100 lt/min
Max. range *	ca. 80-100 m
Max. pumping height*	30 m
Max. pumping pressure	ca. 20-40 bar
Max. water pressure	3 bar
Voltage	400 V 50 Hz
Pump motor	7,5 kW 400 V 50 Hz
Conveying motor	5,5 kW 400 V 50 Hz

MEASUREMENTS + WEIGHT

Length	2500 mm
Height	1800 mm
Width	620 mm
Total weight	ca. 400 kg
Height of silo outlet	1340 mm

* Approximate values that may vary according to type and consistency of the materials used